


MINELAB GPX6000 SPEAKER HORN SL/XL

The speaker horn has been designed to redirect the sound towards the prospector instead of out the back of the detector. It can be difficult to hear the target when using the scoop on the coil, the horn will help with sending the sound towards you. Both the SL [Slimline] and XL [Extra-large] are installed the same way as below.

PREPARATION

- Please ensure that the rear speaker grill is clean from any dirt/dust. Cleaning the GPX6000 speaker grill will make for a good contact with the double-sided tape provided with the speaker horn.
- You do not need to remove the speaker grill from the detector to fit the horn.

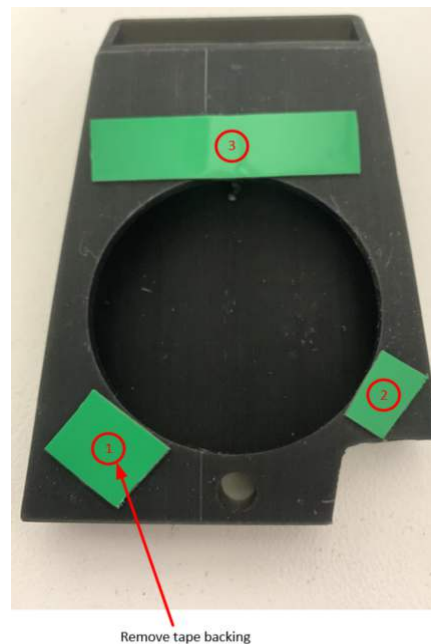

INSTALLATION



- Peel the green backing tape off the double-sided tape on the back of the speaker horn. Do not touch the exposed tape with your fingers as this will reduce the effectiveness of the tape.
- It is best to place the detector vertical against a table when aligning the speaker horn with the speaker grill. Align the screw with the hole in the speaker horn and ensure the speaker horn is evenly spaced on the sides with the detector.
- Once you are happy with the placement press firmly on the speaker horn to ensure double sided tape makes contact.

Note: The tape will bond securely over the next 1-2 days. If you need to remove the speaker horn simply apply new double-sided tape and re-attach.

This product is not endorsed by Minelab, Created and designed by Tryhard Prospecting 2022. Slight imperfections may be seen in the product due to production.

